



# SIBE2013

The Second International Conference  
on Sustainable Infrastructure  
and Built Environment



Faculty of Civil and Environmental Engineering  
Institut Teknologi Bandung

# PROCEEDING BOOK VOLUME III



*"Accelerating Sustainable Infrastructure Development - Challenges,  
Opportunities, and Policy Direction"*

In Collaboration with:



Sponsored by :

IPC



Energy Trade, Energizing Indonesia.

BUKIT BARU  
HARMONI KEHIDUPAN

# **PROCEEDING**

## **Volume III**

**Topic 3. Water Resources Engineering  
and Management**

**Topic 5. Ocean Engineering**



**The Second International Conference on Sustainable Infrastructure  
and Built Environment**

*Accelerating Sustainable Infrastructure Development – Challenges,  
Opportunities, and Policy Direction*

BANDUNG – INDONESIA  
NOVEMBER 19<sup>TH</sup> – 20<sup>TH</sup>, 2013

**International Conference and Exhibition**

Published By  
Faculty of Civil and Environmental Engineering  
Institut Teknologi Bandung – Indonesia



## PREFACE

Infrastructure provides the basic needs of human beings, and sustainable infrastructure systems are essential for the survival, health, and well-being of a society. The civil, environmental, and ocean engineers are at the epicenter in seeking the means to enhance human life through modernization of infrastructure as evidenced by provision of shelter, water, and transport, amongst others.

The current fast rate of urbanization and industrialization has caused a rise in environmental issues, involving environmental mismanagement, which has been associated with unforeseen global catastrophes. The problems are further aggravated by the impacts of environmental degradation such as soil erosion, hurricanes, sea-level rise, depletion of water resources, etc. These issues have become the current focus of attention and studies of the world's academicians and professionals in infrastructure development. Relevant researches include not only hard infrastructure but also soft infrastructure aspects such as regulation, institution, and policy development framework.

To support economic activities and to offer a better quality of life, developing countries need to accelerate sustainable infrastructure provision. In many developing countries, including Indonesia, lack of infrastructure has been the main obstacle of investment and development activities. Besides limited available fund, the acceleration of sustainable infrastructure development still has to face the challenges of, among others, knowledge, human resources management, best practices, and capacity development. On the other hand, developing countries generally possess abundant local natural resources, sufficient carrying capacity, and local wisdom.

In order to meet these multifaceted challenges, not only proper planning, design, implementation and verification exercises, but also clear policy and strategy direction of sustainable infrastructure development are required, via an integrated, multidisciplinary and holistic approach.

The global momentum for sustainable development must now lead to practical applications of the engineering and science of sustainability – an optimization – which allows an accelerated infrastructure provision with maximum attention on sustainability aspects.

The conference will provide an opportunity for professionals and researchers to learn, share and exchange the latest development and research in civil engineering and environmental engineering. The scope of the conference will be broad, covering all aspects of civil and environmental engineering practices.

Participants of the conference include researches, academic staffs, students, industries, public and local governments. The keynote presentations during the conference are as follows:

### Keynote speakers:

- **Ir. Djoko Kirmanto**  
*Minister of Public Works, Indonesia*
- **Prof. Tamon Ueda**  
*Head of International Committee of Faculty of Engineering, Hokkaido University, Japan*
- **Dr. Ir. Bambang Susantono, MSCE., MCP**  
*Vice Minister of Communication, Indonesia*
- **Prof. Shyh-Jian Hwang**  
*National Taiwan University, Taiwan*
- **Prof. Ir. Suprihanto Notodarmojo, Ph.D.**  
*Dean of the Faculty of Civil and Environment Engineering, Institut Teknologi Bandung, Indonesia*
- **Dr. Ir. Achmad Hermanto Dardak, MSc.**  
*Vice Minister of Public Works, Indonesia*
- **Dr. Ir. Dedy Supriadi Priatna, M.Sc.**  
*Deputy Infrastructure of BAPPENAS*
- **Dr. Ir. Lucky Eko Wuryanto, M.Sc.**  
*Deputy Infrastructure of Coordinator Ministry for Economic Affair*

The objectives of the conference are:

1. To provide a platform for exchange of ideas and information among academics, researchers, consultants, engineers, manufacturers and post graduate scholars in civil and environmental engineering
2. To discuss and evaluate the latest approaches, innovative technologies, policies and new directions in infrastructure development, pollution prevention and eco-friendly technologies adapted to developing countries
3. To promote cooperation and networking amongst practitioners and researchers involved in addressing infrastructure and built environment issues

The oral presentations are subdivided into 8 major sections as following:

1. Structure and materials
2. Transportation system and engineering
3. Water resources engineering and management
4. Water & waste engineering and management
5. Ocean engineering
6. Construction management
7. Geotechnical Engineering
8. Environmental protection and management

There are 131 contributors in oral presentation.

Finally, the organizing committee wishes that the conference is able to provide beneficial scientific information to the participants and other concerned readers

Bandung, November 2013

Organizing Committee

## LIST OF COMMITTEE

### STEERING COMMITTEE

Chair : Prof. Dr. Suprihanto Notodarmodjo (ITB)

Co-Chair : Dr. Puti Farida Marzuki (ITB)

1. Prof. Liang-Jenq Leu (NTU, Taiwan)
2. Prof. Naoshi Baba (Hokkaido University, Japan)
3. Prof. Iswandi Imran (ITB)
4. Prof. Syahril B. Kusuma (ITB)
5. Prof. Bambang Sugeng (ITB)
6. Prof. Prayatni Soewondo(ITB)
7. Prof. Arwin Sabar (ITB)
8. Dr. I Wayan Sengara (ITB)
9. Dr. Tri Padi Damanhuri (ITB)
10. Dr. Muslim Muin (ITB)
11. Prof. Ade Sjafruddin (ITB)
12. Dr. Krisnaldi Idris (ITB)

### SCIENTIFIC COMMITTEE

Chair: Prof. Enri Damanhuri (ITB)

Co-Chair: Dr. Krishna S. Pribadi (ITB)

1. Prof. Shyh-Jiann Hwang (NTU, Taiwan)
2. Prof. Naoyuki Funamizu (Hokkaido University, Japan)
3. Prof. Tomoya Shibayama (Waseda University, Japan)
4. Prof. Carl Larsen (NTNU, Norway)
5. Prof. Tsunemi Watanabe (Kochi University of Technology, Japan)
6. Prof. Wisjnuprpto (ITB)
7. Prof. Ofyar Z. Tamin (ITB)
8. Prof. Masyhur Irsyam (ITB)
9. Prof. Amrinsyah Nasution (ITB)
10. Prof. Adang Surahman (ITB)
11. Prof. Indratmo Soekarno (ITB)
12. Prof. Ricky Lukman Tawekal (ITB)
13. Dr. Edwan Kardena (ITB)
14. Dr. Saptahari Soegiri (ITB)
15. Dr. Biemo W. Soemardi (ITB)
16. Dr. R. Driejana (ITB)
17. Dr. Iwan Kridasantausa Hadihardaja (ITB)
18. Dr. Mindriany Syafila (ITB)
19. Ir. Idris Maxdoni Kamil, M.Sc., Ph.D.

### ORGANIZING COMMITTEE

Chair : Prof. Dr. Ir. Rizal Z. Tamin

Co-Chair : Ir. Muhamad Abduh, MT., Ph.D.

Treasurer : Dr. Ir. Dwina Roosmini

	Dr. Muchammad Chaerul, ST., MT. Endra Susila, ST., MT., Ph.D.
General Secretary	: Dr. Nita Yuanita, ST., MT. Dr. Benno Rahadyan, ST., MT. Rofiq Iqbal, ST., M.Eng., Ph.D.
Publication	: Ir. Iwan Kridasantausa, M.Sc., Ph.D., Dr. Russ Bona Frazila, ST., MT. Dr. Ing. Marisa Handayani, ST., MT.
Exhibition	: Dhemi Harlan, ST., MT., Ph.D. Dr. Paramashanti, ST., MT. Ir. R. Driejana, Ph.D.
Sponsorship	: Ir. Agus Jatnika Effendi, Ph.D. Ir. Erza Rismantojo, Ph.D. Emenda Sembiring, ST., MT.
Program	: Dyah Kusumastuti, ST., MT., Ph.D. Ir. Yuniati Z. Azzaino, MT., M.Sc., Ph.D. Joko Nugroho, ST., MT., Ph.D.
Parallel Session	: Prof. Dr. Herlien Dwiarti Soemari Dr. Kania Dewi, ST., MT. Dr. I Made Wahyu Widyarsana, ST., MT.
Social Event	: Ir. Ima Fatima, M.Eng. Dr. Ir. Katharina Oginawati, MS. Prof. Dr. Ing. Prayatni Soewondo, MS.
Logistic	: Dr. Ir. Saptahari M. Soegiri Poetra Dr. Sukandar, ST., MT. Ir. Rildova, MT., Ph.D.
Proceeding	: Ir. Indah Rachmatiah S. S., M.Sc., PhD. Dr. Irsan Soemantri Brodjonegoro, M.Sc., Ph.D. Ivindra Pane, ST., M.SE., Ph.D.
Catering Division	: Aine Kusumawati, ST., MT., Ph.D. Ir. Titi Liliani Soedirdjo, M.Sc. Dra. Barti Setiani Muntalif, Ph.D.
Transportation	: Dr. Ir. Sony Sulaksono Wibowo, MT. Dr. Ing. Ediansjah, ST., MT. Hasbullah Nawir, St., MT., Ph.D.
Acomodation	: Dr. Harmein Rahman, ST., MT. Suharyanto, ST., M.Sc. Hadi Kardhana, ST., MT., Ph.D.

# Contents

PREFACE.....	ii
LIST OF COMMITTEE .....	v
<b>KEYNOTE SPEECH</b>	
Seismic Evaluation and Retrofitting Project of RC School Building in Taiwan By Synh-Jiann Hwang, Lap-Loi Chung, Fu-Pei Hsiao, Hung-Mung Chen, Wen-Cheng Shen, Yeong-Kae Yeh, & Ching Pao Chuang .....	1
General Strengthening Design Approach for Sustainable Structures By Ueda Tamon & Zhang Dave .....	17
<b>TOPIC 3</b>	
<b>WATER RESOURCES ENGINEERING &amp; MANAGEMENT</b>	
Microfiltration: Its Application and Effectiveness as Point of Use (POU) Treatment in Removing Pathogenic Bacteria By Risyana Sukarma & Rokhman Rosyid .....	41
Study of Hydrology Characteristics in Komerling Watershed in Order to Water Resource Supply Sustainability Kayu Agung City By Rosmalinda Permatasari & Arwin Sabar.....	48
Hydraulic Model Test of An Asymmetric Side Spillway Design By Joko Nugroho, Indratmo Soekarno, Yadi Suryadi .....	56
Evaluating Refuge Difficulty Using iRIC-model for Flood Flow Caused By Heavy Rain Disaster in Gifu, Japan: By Kiyoshi Wada & Hitomi Asano .....	66
Numerical Analysis on Countermeasures of Bank Erosion, Case Study Sesayap River, East Kalimantan Indonesia By Puji Harsanto, Hiroshi Takebayashi.....	78
Impact of Climate Change on The Hidrology Regime and Sustainability of Water Availability in Semi Arid Region, West Timor By Jakobis Johanis Messakh, Arwin Sabar, Iwan K. Hadihardadja, & Zdrak Duppe.....	89
Application of Water Resources Management for Transforming a Marginal Floodplain Area into an Oil Palm Plantation: A Case Study of Muara Pahu Floodplain, East Kalimantan By Arno Adi Kuntoro, Cahyono & M.Syahril B.K.....	100

The Development of Water Management System to Decrease Flood Risk and Forest Fire of Oil Palm Plantation in Swamp Area: Case Study of Nagan Raya District, Nanggroe Aceh Darussalam By M Farid, M Cahyono & M Syahril B K .....	116
Resistivity Investigation in Groundwater Aquifer Exploration in Garut, West Java, Indonesia By Muhammad Hanif & Wahyudi W. Parnadi .....	130
Effects of Merapi Eruption in 2010 on Environmental and Social Conditions: Case Study in Pabelan River By Jazaul Ikhsan, Indrasweri N.K.....	137
Rheological Properties of Hyper-concentrated Sediment Laden Flow in Open Channel By Liany A, Hendratta, Zhi Ying Cui & Terunori Ohmoto.....	151
Application of Theory of Planned Behavior on Building Eco-Drainage System As An Alternative Flood Management Solution in Dago and Kampus ITB By Agung Wiyono, Muhammad Fadhil Imansyah & Hendi Susilo Sofyan.....	165
A Review of Rainwater Harvesting System for Stormwater Management By Imroatul C. Juliana, M. Syahril Badri Kusuma & M. Cahyono .....	181
Prediction Of Water Table Level In Tidal Lowland Reclamation Using Back Propagation Neural Network By Nurhayati,, Indratmo Soekarno, Iwan K. Hadihardaja & M. Cahyono .....	190
Study on Dam Risk Assessment as a Decision-Making Tool to Assist Prioritizing Maintenance of Embankment Dam in Indonesia By Edy Anto Soentoro, Arie Bayu Purnomo & Sri HettySusantin .....	202
Understanding the Hydrologic and Hydraulic Factors which Influence the Treatment Performance of Bioretention Basin By Isri Ronald Mangangka .....	217
Assesment of the Contribution of the Flood Hydrograph of Cirasea, Cidurian and Ciwidey River in Affecting Flood Index in Bandung Basin: By RI Siregar, MSB Kusuma & M Farid.....	231
A 3-Dimensional Numerical Study of Flow Patterns around Three Types of Drop Spillway By Dantje K. Natakusumah, DhemiHarlan, Fitra Adinata, Waluyo Hatmoko, Ade Khairani Tobing, Muhammad Juangga & M. Rizki Kusmaryadi .....	243
Spatio Analysis of Hydrological for Regional Drought Index. Case Studies Citarum River Basin, By L A Anzar, MSB Kusuma & A A Kuntoro .....	254
Flood Control Performance Evaluation At Upper Citarum, West Java, Indonesia By Anik Sarminingsih, M.Syahril B.K, Indratmo Soekarno and Iwan K.Hadihardaja .....	271



Study of Sedimentation Problem and Selection of Barge Size Regarding to the Cost Efficiency to Support the Coal Mining Transportation on Segah River, East Kalimantan By Bobby Minola Ginting & Prayoga Luthfil Hadi.....	284
Energy Gradient Effect on The Stability Structure of The River Bed Armour Layer By Cahyono Ikhsan, Mamok Suprpto , Solichin & Kusno Adi Sambowo .....	302
Reservoir Sedimentation Rate Control to Maximize Of Electricity Production (Case Study : Reservoir Cirata) By Welstien Herma Tatipata, Indratmo Soekarno, Arwin Sabar, Sri legowo.....	310
Regional Environment Simulator It's Applications to Environmental Assesment in Estuary with Consideration of Climate Changes By Takao Yamashita.....	322

## **TOPIC 5**

### **OCEAN ENGINEERING**

Hydrodynamic Conditions Influenced by Wave Reflection from Coastal Structure By Widyaningtias, Hitoshi Tanaka & M. Cahyono .....	346
A Numerical Study on Cylinders with Passive Control Device of Helical Rods with Gap for Reducing Vortex-induced Vibration By Agung Sugiwanto, Rudi W. Prastianto, Murdjito & Eko B. Djatmiko .....	357
Underwater Acoustics Shadow Zone Modeling in Indonesian Waters using Ray Tracing Method By Irsan S Brodjonegoro & Ajie Nur Rendragraha .....	369
Application of Movable Correction Factor for Tsunami Event on Mentawai Coast, West Sumatera By Yuyus Rudimansah, Iwan K. Hadihardaja, Hamzah Latief & Dian Indriani .....	391

# Contents

PREFACE.....	ii
LIST OF COMMITTEE .....	v
<b>KEYNOTE SPEECH</b>	
Seismic Evaluation and Retrofitting Project of RC School Building in Taiwan By Synh-Jiann Hwang, Lap-Loi Chung, Fu-Pei Hsiao, Hung-Mung Chen, Wen-Cheng Shen, Yeong-Kae Yeh, & Ching Pao Chuang .....	1
General Strengthening Design Approach for Sustainable Structures By Ueda Tamon & Zhang Dave .....	17
<b>TOPIC 3</b>	
<b>WATER RESOURCES ENGINEERING &amp; MANAGEMENT</b>	
Microfiltration: Its Application and Effectiveness as Point of Use (POU) Treatment in Removing Pathogenic Bacteria By Risyana Sukarma & Rokhman Rosyid .....	41
Study of Hydrology Characteristics in Komerling Watershed in Order to Water Resource Supply Sustainability Kayu Agung City By Rosmalinda Permatasari & Arwin Sabar.....	48
Hydraulic Model Test of An Asymmetric Side Spillway Design By Joko Nugroho, Indratmo Soekarno, Yadi Suryadi .....	56
Evaluating Refuge Difficulty Using iRIC-model for Flood Flow Caused By Heavy Rain Disaster in Gifu, Japan: By Kiyoshi Wada & Hitomi Asano .....	66
Numerical Analysis on Countermeasures of Bank Erosion, Case Study Sesayap River, East Kalimantan Indonesia By Puji Harsanto, Hiroshi Takebayashi.....	78
Impact of Climate Change on The Hidrology Regime and Sustainability of Water Availability in Semi Arid Region, West Timor By Jakobis Johanis Messakh, Arwin Sabar, Iwan K. Hadihardadja, & Zdrak Duppe.....	89
Application of Water Resources Management for Transforming a Marginal Floodplain Area into an Oil Palm Plantation: A Case Study of Muara Pahu Floodplain, East Kalimantan By Arno Adi Kuntoro, Cahyono & M.Syahril B.K.....	100

The Development of Water Management System to Decrease Flood Risk and Forest Fire of Oil Palm Plantation in Swamp Area: Case Study of Nagan Raya District, Nanggroe Aceh Darussalam By M Farid, M Cahyono & M Syahril B K .....	116
Resistivity Investigation in Groundwater Aquifer Exploration in Garut, West Java, Indonesia By Muhammad Hanif & Wahyudi W. Parnadi .....	130
Effects of Merapi Eruption in 2010 on Environmental and Social Conditions: Case Study in Pabelan River By Jazaul Ikhsan, Indrasweri N.K.....	137
Rheological Properties of Hyper-concentrated Sediment Laden Flow in Open Channel By Liany A, Hendratta, Zhi Ying Cui & Terunori Ohmoto.....	151
Application of Theory of Planned Behavior on Building Eco-Drainage System As An Alternative Flood Management Solution in Dago and Kampus ITB By Agung Wiyono, Muhammad Fadhil Imansyah & Hendi Susilo Sofyan.....	165
A Review of Rainwater Harvesting System for Stormwater Management By Imroatul C. Juliana, M. Syahril Badri Kusuma & M. Cahyono .....	181
Prediction Of Water Table Level In Tidal Lowland Reclamation Using Back Propagation Neural Network By Nurhayati,, Indratmo Soekarno, Iwan K. Hadihardaja & M. Cahyono .....	190
Study on Dam Risk Assessment as a Decision-Making Tool to Assist Prioritizing Maintenance of Embankment Dam in Indonesia By Edy Anto Soentoro, Arie Bayu Purnomo & Sri HettySusantin .....	202
<b>Understanding the Hydrologic and Hydraulic Factors which Influence the Treatment Performance of Bioretention Basin</b> By Isri Ronald Mangangka .....	217
Assesment of the Contribution of the Flood Hydrograph of Cirasea, Cidurian and Ciwidey River in Affecting Flood Index in Bandung Basin: By RI Siregar, MSB Kusuma & M Farid.....	231
A 3-Dimensional Numerical Study of Flow Patterns around Three Types of Drop Spillway By Dantje K. Natakusumah, DhemiHarlan, Fitra Adinata, Waluyo Hatmoko, Ade Khairani Tobing, Muhammad Juangga & M. Rizki Kusmaryadi .....	243
Spatio Analysis of Hydrological for Regional Drought Index. Case Studies Citarum River Basin, By L A Anzar, MSB Kusuma & A A Kuntoro .....	254
Flood Control Performance Evaluation At Upper Citarum, West Java, Indonesia By Anik Sarminingsih, M.Syahril B.K, Indratmo Soekarno and Iwan K.Hadihardaja .....	271

Study of Sedimentation Problem and Selection of Barge Size Regarding to the Cost Efficiency to Support the Coal Mining Transportation on Segah River, East Kalimantan By Bobby Minola Ginting & Prayoga Luthfil Hadi.....	284
Energy Gradient Effect on The Stability Structure of The River Bed Armour Layer By Cahyono Ikhsan, Mamok Suprpto , Solichin & Kusno Adi Sambowo .....	302
Reservoir Sedimentation Rate Control to Maximize Of Electricity Production (Case Study : Reservoir Cirata) By Welstien Herma Tatipata, Indratmo Soekarno, Arwin Sabar, Sri legowo.....	310
Regional Environment Simulator It's Applications to Environmental Assesment in Estuary with Consideration of Climate Changes By Takao Yamashita.....	322

## **TOPIC 5**

### **OCEAN ENGINEERING**

Hydrodynamic Conditions Influenced by Wave Reflection from Coastal Structure By Widyaningtias, Hitoshi Tanaka & M. Cahyono .....	346
A Numerical Study on Cylinders with Passive Control Device of Helical Rods with Gap for Reducing Vortex-induced Vibration By Agung Sugiwanto, Rudi W. Prastianto, Murdjito & Eko B. Djatmiko .....	357
Underwater Acoustics Shadow Zone Modeling in Indonesian Waters using Ray Tracing Method By Irsan S Brodjonegoro & Ajie Nur Rendragraha .....	369
Application of Movable Correction Factor for Tsunami Event on Mentawai Coast, West Sumatera By Yuyus Rudimansah, Iwan K. Hadihardaja, Hamzah Latief & Dian Indriani .....	391



## **Understanding the Hydrologic and Hydraulic Factors which Influence the Treatment Performance of Bioretention Basin**

**Isri Ronald Mangangka<sup>1</sup>**

<sup>1</sup>Civil Engineering Department, Sam Ratulangi University, Manado, Indonesia  
Email: isrimangangka@hotmail.com

**Abstract.** Bioretention basins are a common stormwater structural treatment measure used to remove stormwater pollutants. They perform as pollutant removal devices using filtration as the main mechanism, supported by evapotranspiration, adsorption and biotransformation. The effectiveness of bioretention basin on removing stormwater pollutants are influenced by factors such as hydrologic, hydraulic physico-chemical and biological factors. This paper presents outcomes from an in-depth study undertaken to define treatment characteristics of a bioretention basin highlighting the influence of hydrologic and hydraulic factors. The study included a comprehensive field monitoring of a well-established bioretention basin, development of a hydraulic conceptual model to simulate water infiltration process within the system and state-of-the-art multivariate analysis of stormwater quantity and quality data to understand correlations and define linkages between treatment performance and influential hydrologic and hydraulic factors. Samples collected at the inlet and outlet was tested for Total Suspended Solid (TSS), nitrogen species i.e. Total Nitrogen (TN), Nitrite (NO<sub>2</sub>), Nitrate (NO<sub>3</sub>), Ammonium (NH<sub>4</sub>) and phosphorus species i.e. Phosphate (PO<sub>4</sub>) and Total Phosphorus (TP). The analysis results revealed that only TSS concentration was consistently reduced while the concentration of other pollutants was reduced for some rainfall events but increased for the others. While the antecedent dry period (AD) affects the concentration reduction of all pollutants, the other factors such as rainfall depth (RD), outflow peak (OP), contributed wetted area (CA) and volume of treated stormwater (VT) showed no correlation with any pollutant concentration reduction. Analysis results showed that AD reduces the concentration of NO<sub>2</sub> and NH<sub>4</sub> but increases the concentration of NO<sub>3</sub> and TN indicating that nitrification possibly occurs in the bioretention basin. The results also showed that the superior pollutant load reduction was in medium and low depth of rainfall events due to high fraction of runoff retain within the system.

**Keywords:** *use 10 pt; lower case; italic; Times; write alphabetically in 5-10 words.*

### **1 Introduction**

A bioretention basin or also called biofilter performs as a pollutant removal device using filtration as the main mechanism, supported by evapotranspiration, adsorption and biotransformation. This is in addition to attenuation of runoff peak

flow and reduction of runoff volume through detention and retention [1]. Past studies have reported that pollutant concentration reduction in bioretention basins is poor for a range of pollutant species particularly for nutrient species [1][2][3][4]. However, a substantial reduction in outflow volume can lead to significant reduction in pollutant loads [5].

A range of studies have been conducted for assessing bioretention basin performance and hydraulic and pollutant removal processes [6][7][8][9][10][11][12]. However, most of the past field studies have been conducted to evaluate the long term treatment performance while most of the studies which focused on developing an in-depth understanding of processes have been conducted using laboratory-scale models [13][14][15]. This paper presents the outcomes of a detailed study of an on-site bioretention basin which was monitored to understand the influence of hydrologic and hydraulic factors on bioretention basin treatment performance.

## **2 Methods**

### **2.1 Study Site**

The bioretention basin selected for the study was located at ‘Coomera Waters’ residential estate, Gold Coast, about 55 km South of Brisbane, the capital city of Queensland, Australia (Figure 1 (a)). This bioretention basin was selected due to the availability of historical rainfall, runoff and water quality data. The size of the bioretention basin was 248 m<sup>2</sup>, approximately 3.8% of the contributing catchment area of 6,530 m<sup>2</sup> (Figure 1(b)). The basin consisted of 0.8 m thick filter media, covered by grass bed surface and 0.2 m thick drainage layer underneath the filter media consisting of granular material. The filter media promoted stormwater treatment through infiltration while the grass maintained the porosity of the basin surface. A network of perforated pipes in the drainage layer conveyed infiltrated stormwater to the outlet control pit. The inlet to the bioretention basin and the outlet have been monitored since April 2008 using automatic monitoring stations to record rainfall and runoff data and to capture stormwater samples for water quality testing.

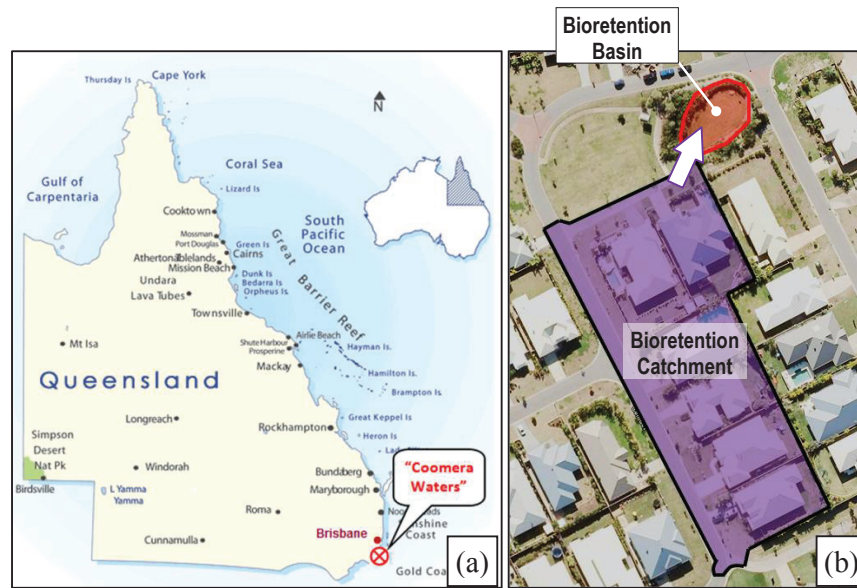


Figure 1 Study site (a), bioretention basin and contributing catchment (b)

## 2.2 Sampling and Testing


Only runoff samples from rainfall events with more than five antecedent dry days were tested. This was to allow an appreciable amount of pollutants to be built-up on catchment surfaces. Egodawatta et al. [16] have found that a minimum of five antecedent dry days can result in more than 75% of the maximum possible build-up on road surfaces. Samples were analysed for a suite of water quality parameters as shown in Table 1 given below. Further detail of the sampling protocol is explained in Mangangka et al. [17] and Parker et al. [18].

Table 1 Summary of physical parameters.

Parameter	Test Method	Comments
TSS	APHA No. 2540D	Filtered using 0.45µm glass fibre filter paper
TN as TKN + NO <sub>2</sub> + NO <sub>3</sub>	TKN: US EPA No. 351.2 NO <sub>2</sub> : US EPA No. 353.2 NO <sub>3</sub> : US EPA No. 354.1	Smartchem 140 was used. For TKN, samples were digested using AIM600 block digester
TP	US EPA No. 365.1 and US EPA No. 365.4	Smartchem 140 was used. Samples digested using AIM600 block digester

### 2.3 Bioretention Basin Conceptual Model

A conceptual model was developed to replicate the hydraulic behaviour of the bioretention basin. Greater details on the conceptual model development, calibration and simulation are explained in Mangangka [19]. Hydraulic characteristics of a bioretention basin are primarily based on infiltration and percolation of stormwater through the filter media which can be best replicated by 3-dimensional flow models. However, due to the complexity of the 3-dimensional flow models which are very complex and often require numerical analysis [20], an assumption was made to convert it to a 1-dimensional flow system. For this, the bioretention area was divided into a number of equal zones. A trial and error process used suggested that 10 equal zones were suitable for the model. The stormwater movement over the surface was as a flow from zone 1 where the inlet structure was located to zone 10 where the outlet structure was located (Figure 2).

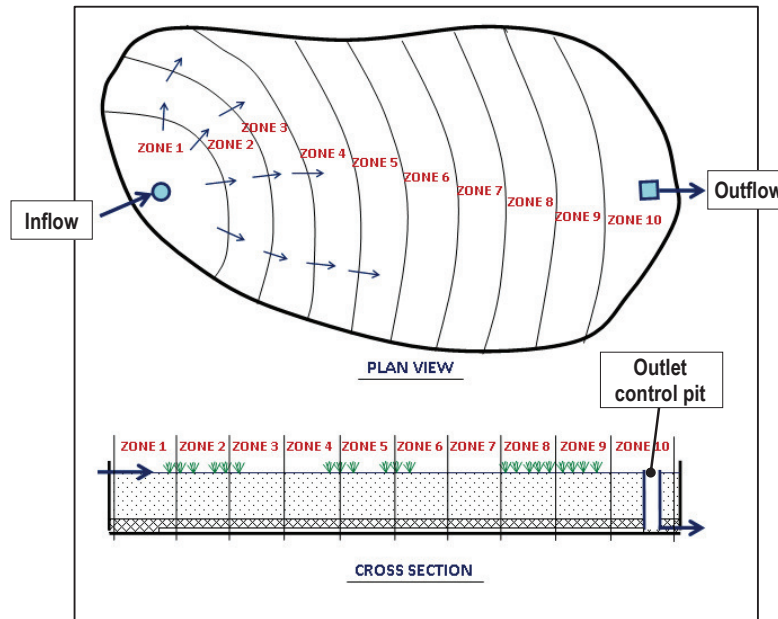

**Figure 2** Simplifying 3-dimensional flow into 1-dimensional column based flow


The stormwater flow within the bioretention basin was modeled according to the processes described in the following steps:

- Stormwater runoff enters the bioretention basin through the inlet structure in zone 1 which is assumed as a soil column.



- The stormwater runoff then infiltrates into the soil column which is replicated using the Green-Ampt infiltration model.
- When the inflow rate is higher than the soil column infiltration capacity, the excess runoff becomes surface flow to the next soil column.
- The infiltrated water then percolates until it reaches the drainage layer in which the stormwater is temporarily stored.
- Part of stormwater stored in the drainage layer percolates to the original soil layer underneath.
- Through perforated pipes, stormwater in the drainage layer flows to the outlet structure where the outlet was monitored.

The conceptual model developed to replicate the bioretention basin was calibrated using measured data from inlet and outlet. For this purpose data from 12 rainfall events which occurred from 29 January 2008 to 29 March 2011 were used. The calibration was performed by adjusting coefficients in all the standard flow control equations using a trial and error approach. An example of the model performance is shown in Figure 3.

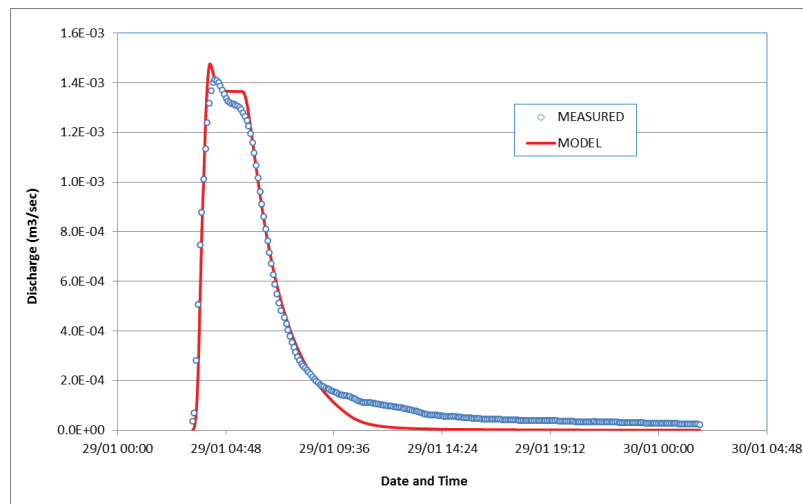

**Figure 3** Bioretention basin measured and modeled discharge hydrograph

The model was used to obtain hydrologic and hydraulic parameters based on simulations to undertake performance evaluation of the bioretention basin. In this regard, four influential variables; contributed wetted area (CA), volume of runoff

retained in the filter media (VR), volume of runoff treated (VT) and outflow peak (OP) were identified as being influential parameters.

## 2.4 Analytical Tools

The analytical tools were selected based on their ability for processing a multi variable dataset to investigate relationships between the objects and the variables. Among the range of multivariate techniques available, principal component analysis (PCA) was the most appropriate for this analysis [21]. PCA is essentially a pattern recognition technique which can be used to understand the correlations among different variables and clusters among objects. It has been used extensively as an analytical tool in water quality research [22][23][24].


PCA transforms the original variables to a new orthogonal set of Principal Components (PCs) such that the first PC contains most of the data variance and the second PC contains the second largest variance and so on. Outcomes of PCA are typically presented as a biplot, which is a plot of two orthogonal PCs illustrating object scores and variable vectors [25]. The objects that exhibit similar variances for the analysed variables have similar PCA scores forming a cluster when plotted on a biplot. Additionally, strongly correlated variables have the same magnitude and orientation when plotted, whereas uncorrelated variables are orthogonal to each other. Detailed descriptions of PCA can be found elsewhere [21][26].

## 3 Result and Discussion

### 3.1 Analysis of the Treatment Performance on Lumped Basis

PCA was initially undertaken to investigate the treatment characteristics of the bioretention basin using the event mean concentration (EMC) values at the inlet and the outlet. Water quality/ pollutant parameters used were; EC, TSS,  $\text{NH}_4$ ,  $\text{NO}_2$ ,  $\text{NO}_3$ , TN,  $\text{PO}_4$  and TP. Data from 12 rainfall events were investigated which formed a matrix with 24 objects due to the occurrence of two sampling locations. The resulting PCA biplot is shown in Figure 4.

Figure 4 shows that the inlet and outlet samples tend to cluster into two separate groups based on the projected scores on PC2 axis. Most inlet samples (Cluster A) show negative scores on PC2, while most outlet samples (Cluster B) show positive scores on PC2. This indicates that inlet and outlet samples are significantly different in terms of their pollutant concentrations suggesting that significant water quality changes occur when the stormwater flows from the inlet to the outlet through the bioretention basin.

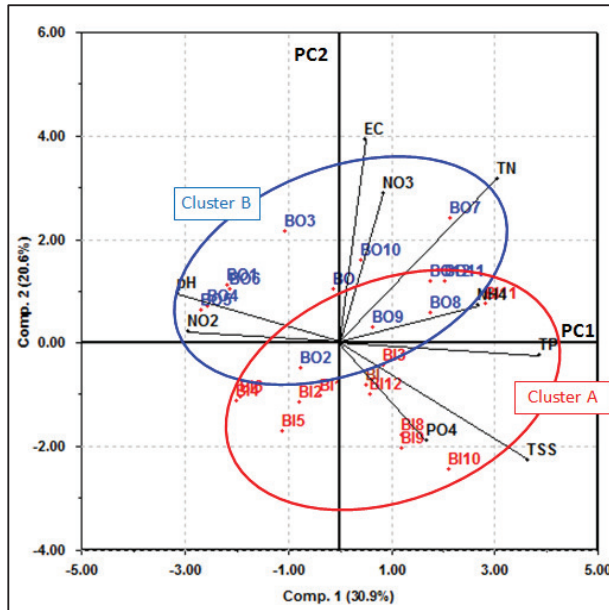

**Figure 4** Biplot of water quality and pollutant event mean concentration at the inlet and outlet

As evident in Figure 4, that outlet sample objects (Cluster B) are generally located in the same direction where the vectors of EC and nitrogen compounds are directed, while the inlet sample objects (Cluster A) are generally located in the same direction as the vectors of TSS and phosphorus compounds are directed. This indicates that while the concentration of TSS and phosphorus species decreases, EC and nitrogen species concentrations tend to increase due to the processes in the bioretention basin. This agrees with the results of previous studies which reported that the concentration reduction of nitrogen species is poor [1][2][3][4]. Furthermore, similar trend in phosphorus compounds and TSS confirms that the phosphorus compounds are mostly available in particulate form, attached to suspended solids due to adsorption.

### 3.2 Influence of Hydrologic/Hydraulic Factors on Pollutant Concentration Reduction


Analysis of the performance of the constructed wetland was undertaken based on the reduction in EMC values. Table 2 shows the percentage concentration reductions (for example TSS-R is the percentage EMC reduction for TSS) for the 12 rainfall events. The percentage was calculated with respect to inflow water quality.

**Table 2** Pollutant concentration reduction and hydrologic/hydraulic factors

Rainfall Event ID	EMC Reduction							Hydrologic and Hydarulic Parameters						
	TSS-R	NH4-R	NO2-R	NO3-R	TN-R	PO4-R	TP-R	Rainfall Depth (RD)	Rainfall Intensity (RI)	Antecedent Dry Period (AD)	Volume Treated (VT)	Volume Retained (VR)	Outflow Peak (OP)	Cont. Area (CA)
	(%)	(%)	(%)	(%)	(%)	(%)	(%)	(mm)	(mm/hr)	(day)	(m <sup>3</sup> )	(m <sup>3</sup> )	(m3/sec)	(%)
B1	18.09	61.73	6.85	-87.50	-17.73	66.42	58.54	20.6	7.36	8.51	54.65	31.33	0.00153	70
B2	3.23	64.40	-36.36	-57.30	-31.04	-69.23	-58.09	52.0	14.86	3.05	87.73	22.00	0.00342	100
B3	43.91	92.56	38.99	-51.16	-48.69	67.97	32.72	12.0	5.45	6.60	31.03	23.23	0.00134	50
B4	74.03	71.73	16.23	-112.57	-70.34	-38.74	1.73	18.4	3.91	6.83	51.69	24.81	0.00126	40
B5	66.54	71.05	9.57	-145.10	-63.04	49.47	55.82	44.6	5.95	10.48	112.26	48.86	0.00188	100
B6	36.39	61.47	-39.39	-98.14	-82.55	26.17	18.10	51.8	8.22	13.05	79.06	38.47	0.00303	70
B7	3.87	-15.52	68.69	39.79	19.71	-38.49	27.63	25.8	4.69	10.36	70.56	49.51	0.00155	100
B8	14.26	-69.38	-47.59	0.24	-49.83	-0.73	-31.30	19.4	8.08	4.24	49.33	20.38	0.00146	40
B9	50.26	-37.78	-102.00	-36.06	-41.66	24.38	-13.88	4.8	2.53	4.56	8.70	6.03	0.00052	10
B10	44.99	-41.25	-63.65	-69.99	-10.29	70.38	9.54	9.6	8.73	10.50	31.87	28.41	0.00093	50
B11	25.30	-74.94	-186.18	40.11	20.58	-101.63	-21.31	20.2	8.78	5.88	28.88	23.20	0.00159	40
B12	21.36	-44.06	-123.02	50.49	-71.14	57.84	5.74	12.6	6.63	13.07	38.82	31.17	0.00130	60

PCA was undertaken to assess the stormwater treatment performance of the bioretention basin based on the reductions in EMC values. For this analysis, hydrologic and hydraulic parameters were also included in order to investigate the linkage between treatment performance and the underlying flow scenarios in the bioretention basin. The parameters selected were rainfall depth (RD), rainfall intensity (RI), antecedent dry period (AD), volume of runoff treated (VT), volume of runoff retained in the filter media (VR), outflow peak (OP) and average retention time (RT), outflow peak (OP) and contributed wetted area (CA). The resulting PCA biplot is shown in Figure 5.

The biplot shows that the hydrologic and hydraulic factors and pollutant concentration reductions have formed the objects clustered with respect to rainfall depth. The clustering suggests that the rainfall events should be classified into three categories; high, medium-high, medium and low rainfall depth. The biplot also shows a similar trend in the reduction of TSS, PO<sub>4</sub> and TP concentrations confirming that in stormwater runoff, phosphorus is mostly transported with particulates due to their tendency to adsorb to soil particles and organic matter [27][28][29]. Furthermore, Figure 5 shows that the reduction of TSS, PO<sub>4</sub> and TP concentrations was correlated with the increase of the antecedent dry period. This could be attributed that longer antecedent dry period increases pollutant built-up on surfaces with higher particulate fraction [30][31].

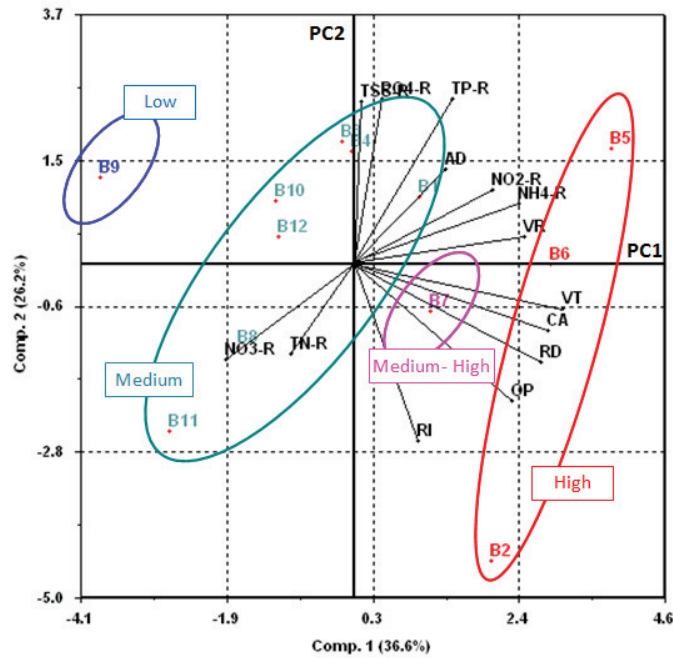


**Figure 5** PCA biplot for pollutant concentrations reduction and hydrologic/hydraulic factors

Moreover, Figure 5 shows strong correlation of AD with NO<sub>2</sub>-R and NH<sub>4</sub>-R while showing a negative correlation with NO<sub>3</sub>-R and TN-R. This indicates that longer antecedent dry period reduces the concentration of NO<sub>2</sub> and NH<sub>4</sub>, but increases the concentration of NO<sub>3</sub> confirming that nitrification possibly occurs in the bioretention basin. Longer antecedent dry period allows ammonium oxidation, which would reduce NH<sub>4</sub>, and promote nitrite oxidation. This in turn reduces NO<sub>2</sub> and increases NO<sub>3</sub>.

### 3.3 Hydrologic/Hydraulic Factors and Pollutant Load Reduction

Analysis of pollutant reduction in previous section shows that the concentration of some pollutant species decreased while the other pollutant species increased (negative reduction). However, this could provide misleading interpretation due to the significant reduction in the stormwater volume. Therefore, the actual amount of pollutant reduction should be best presented based on the load reduction. Similar data matrix as presented in Table 2 with EMC reduction replaced by pollutant loading reduction was analyzed using PCA. The resulting PCA biplot is shown in Figure 6.

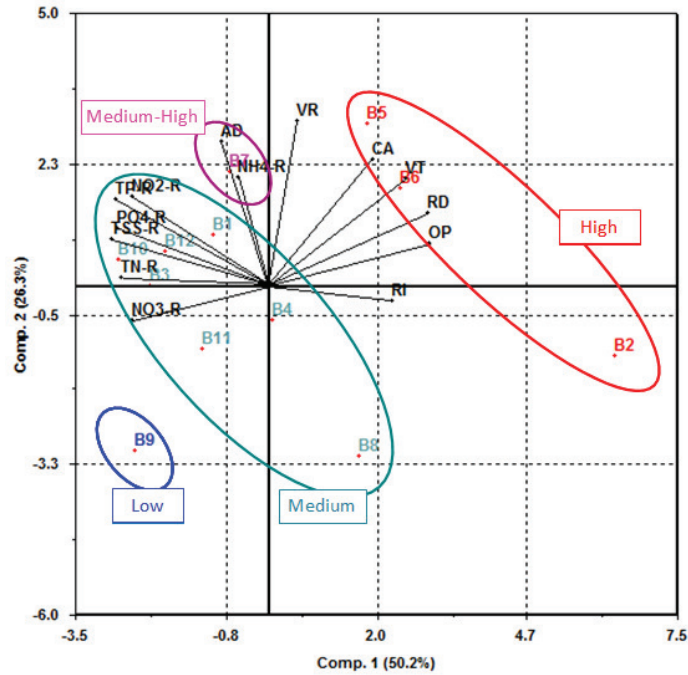

**Figure 6** PCA biplot for pollutant load reduction and hydrologic/hydraulic factors

Similar with previous PCA result, Figure 6 shows that rainfall events with relatively high, medium-high, medium and low rainfall depths are clustered separately. Importantly, pollutant load reduction vectors, TSS-R, TN-R, NO<sub>2</sub>-R, NO<sub>3</sub>-R, TP-R and PO<sub>4</sub>-R are pointed towards medium rainfall depths. This suggests that the pollutant load reductions for these events are much superior compared to others. This is also supported by the negative correlation between pollutant load reduction vectors and influential hydraulic factors such as VT, CA and OP.

Some load reduction vectors are also correlated with AD and VR. Longer antecedent dry period typically leads to high retention of runoff volume within the bioretention basin filter media. This suggests that the higher percentage load reduction in medium and low events is due to high fraction of runoff retention within the system. All the percentage load reduction vectors are pointed in the same direction. This suggests a similar pattern in pollutant load reduction for all the pollutant species.

Figure 6 also shows very strong correlation between  $\text{NH}_4\text{-R}$  and AD. This means that longer antecedent dry period results in higher reduction in  $\text{NH}_4$  load. This suggests the possible contribution of the nitrification process in the treatment for rainfall events with long antecedent dry period.

#### 4 Conclusions

The primary conclusions from the study are:

- The concentration reductions of TSS and phosphorus compounds were strongly correlated. Concentration of TSS and phosphorus compounds reduced in the outflow and the reduction is in line with the increase in antecedent dry period. When the antecedent dry period increased, the amount and average size of particulate pollutant also increased. This resulted in more solid particles being filtered and consequently reduced the TSS concentration and phosphorus bound to TSS.
- In bioretention basin, volume of runoff retained is an important factor, and is a function of antecedent dry period, volume of runoff treated and contributed wetted area. Since treatment in a bioretention basin is highly correlated with volume of runoff retained, other factors such as rainfall characteristics (rainfall depth and intensity) and outflow peak are not significant.
- Bioretention basin showed potential for pollutant leaching and to produce plug flow discharge of pollutants. This could be due to flushing of runoff retained in the filter media from the preceding rainfall event which could have contained elevated dissolved nutrient concentrations due to evapotranspiration.
- Longer antecedent dry period reduces the concentration of  $\text{NO}_2$  and  $\text{NH}_4$ , but increases  $\text{NO}_3$  concentration. This is an indication of the nitrification process occurring within the bioretention basin. A longer antecedent dry period allows ammonium oxidation which reduces  $\text{NH}_4$  and promotes nitrite oxidation which reduces  $\text{NO}_2$  and increases  $\text{NO}_3$ .
- Even though nitrogen concentrations are more often elevated in the bioretention basin outlet, the overall loadings of all pollutants were reduced.

#### 5 References

- [1] Davis, A.P., Shokouhian, M., Sharma, H. & Minami, C., *Water quality improvement through bioretention media: nitrogen and phosphorus removal*, Water Environment Research, **78**, pp. 2177-2185. 2006.

- [2] Hatt, B.E., Deletic, A. & Fletcher, T.D., *Stormwater reuse: Designing biofiltration systems for reliable treatment*, Water Science Technology, **55**(4), pp. 201-209, 2007.
- [3] Henderson, C., Greenway, M. & Phillips, I., *Removal of dissolved nitrogen, phosphorus and carbon from stormwater by biofiltrationmesocosms*, Water Science and Technology, **55**(4), pp. 183-191, 2007.
- [4] Greenway, M., *The role of media, microbes and macrophytes in improving the effectiveness of bioretention systems, have we got it right?*, in SIA Stormwater Conference. Gold Coast, 2008.
- [5] Hunt, W.F., Jarrett, A.R., Smith, J.T. & Sharkey, L.J., *Evaluating bioretention hydrology and nutrient removal at three field sites in North Carolina*, Journal of Irrigation and Drainage Engineering, **132**(6), pp. 600–608, 2006.
- [6] Davis, A.P., *Field Performance of bioretention: Water quality*, Environmental Engineering Science, **24**(8), pp. 1048-1064, 2007.
- [7] Davis, A.P., *Field performance of bioretention: Hydrology impacts*, Journal of Hydrologic Engineering, **13**(2), pp. 90-95, 2008.
- [8] Dietz, M.E. & Clausen, J.C., *A field evaluation of rain garden flow and pollutant treatment*, Water, Air and Soil Pollution, **167**(1-4), pp. 123-138, 2005.
- [9] He, Z., Davis, A.P. & Asce, F., *Process Modeling of Storm-Water Flow in a Bioretention Cell*, Journal of Irrigation and Drainage Engineering, **137**(3), pp. 121-131, 2011.
- [10] Heasom, W., Traver, R.G. & Welker, A., *Hydrologic modeling of a bioretention best management practice*, Journal of the American Water Resources Association, **42**(5), pp. 1329-1347. 2006.
- [11] Hsieh, C.H. & Davis, A.P., *Evaluation and optimization of bioretention media for treatment of urban stormwater runoff*, Journal of Environmental Engineering, **131**(11), pp. 1521-1531, 2005.
- [12] Hsieh, C.H., Davis, A.P. & Needelman, B.A., *Nitrogen removal from urban stormwater runoff through layered bioretention columns*, Water Environment Research, **79**(12), pp. 2404-2411, 2007a.
- [13] Hsieh, C.H., Davis, A.P. & Needelman, B.A., *Bioretention column studies of phosphorus removal from urban stormwater runoff*, Water environment research: A research publication of the Water Environment Federation, **79**(2), pp. 177-184, 2007b.
- [14] Moore, J.R., *Effect of compaction on removal efficiency of lead, copper, zinc, nitrate, and phosphate in a bioretention system a column study*, PhD Thesis, 2008.
- [15] Zhang, L., Seagren, E.A., Davis, A.P. & Karns, J.S., *Long-term sustainability of Escherichia coli removal in conventional bioretention media*, Journal of Environmental Engineering, **137**(8), pp. 669- , 2011.



- [16] Egodawatta, P., Goonetilleke, A., Ayoko, G.A. & Thomas, E., *Understanding the interrelationship between stormwater quality and rainfall and runoff factors in residential catchments*, in 7th International Conference on Urban Drainage Modelling and the 4<sup>th</sup> International Conference on Water Sensitive Urban Design, Melbourne, Australia., pp. 43-50, 2006.
- [17] Mangangka, I.R., Egodawatta, P., Rajapakse, J. & Goonetilleke, A., *Understanding Treatment Characteristics of Constructed Stormwater Wetlands*, in the 2012 Hydrology & Water Resources Symposium, Sydney, Australia, 2012.
- [18] Parker, N., Gardner, T., Goonetilleke, A., Egodawatta, P. & Giglio, D., *Effectiveness of WSUD in the 'real world'*, in Proceedings of the 6th International Water Sensitive Urban Design Conference, Perth, Western Australia, 2009.
- [19] Mangangka, I.R., *Role of Hydraulic Factors in Constructed Wetland and Bioretention Basin Treatment Performance*, PhD Thesis, Science and Engineering Faculty, Queensland University of Technology, Brisbane, 2013.
- [20] Chow, V.T., Maidment, D.R. & Mays, L.W., *Applied hydrology*, Ed. Clark, B. J. & Morriss, J., New York: McGraw-Hill, Inc., 1988.
- [21] Kokot, S., Grigg, M., Panayiotou, H. & Phuong, T.D., *Data interpretation by some common chemometrics methods*, *Electroanalysis*, **10**(16), pp. 1-8, 1998.
- [22] Liu, A., Goonetilleke, A. & Egodawatta, P., *Inadequacy of land use and impervious area fraction for determining urban stormwater quality*, *Water Resources Management*, **26**(8), pp. 2259-2265, 2012.
- [23] Miguntanna, N.S., Egodawatta, P., Kokot, S., & Goonetilleke, A., *Determination of a set of surrogate parameters to assess urban stormwater quality*, *Science of the Total Environment*, **408**(24), pp. 6251-6259, 2010.
- [24] Gunawardana, C., Goonetilleke, A., Egodawatta, P., Dawes, L. & Kokot, S., *Role of solids in heavy metal pollution of receiving waters*. *Journal of Environmental Engineering*, **138**, pp. 490-498, 2011.
- [25] Goonetilleke, A., Thomas, E., Ginn, S.P., & Gilbert, D., *Understanding the role of land use in urban stormwater quality management*. *Journal of Environmental Management*, **74**(1), pp. 31-42, 2005.
- [26] Adams, M.J., *Chemometrics in analytical spectroscopy*, Cambridge: Royal Society of Chemistry, 2004.
- [27] Quinton, J.N., Catt, J.A. & Hess, T.M., *The selective removal of phosphorus from soil: Is event size important?*, *Journal of Environ. Qual.*, **30**, pp. 538-545, 2001.
- [28] Uusitalo, R., Yli-Halla, M. & Turtola, E., *Suspended solid as a source of potentially bioavailable phosphorus in surface runoff*, *Water Research*, **34**(9), pp. 2477-2482, 2000.

- [29] Zhao, J., Shan, B. & Yin, C., *Pollutant loads of surface runoff in Wuhan city Zoo, an urban tourist area*, Journal of Environmental Sciences, **19**, pp. 464-468, 2007.
- [30] Vaze, J., Chiew, F.H.S., Suryadi, L. & Khanal, K., *Pollutant accumulation on an urban road surface*, Urban Water, **14**, pp. 265-270, 2000.



# SIBE2013

The Second International Conference on Sustainable Infrastructure and Built Environment

Accelerating Sustainable Infrastructure Development - Challenges, Opportunities, and Policy Direction

# Certificate of Participation

this is to certify that

**Isri Ronald Mangangka**

has participated as a/an

**Presenter**

in **The Second International Conference on Sustainable Infrastructure and Built Environment** held from November 19<sup>th</sup> - 20<sup>th</sup>, 2013 in Bandung, Indonesia

**Prof. Ir. Suprihanto Notodarmojo, Ph.D**  
Dean of Faculty of Civil and Environment Engineering ITB

**Prof. Dr. Ir. Rizal Z. Tamin**  
Chair of SIBE-2013 Organizing Committee

Organized by



In Collaboration with



Main Sponsor



Emerging Trade, Emerging Indonesia.

